
HEUER
HEBETECHNIK

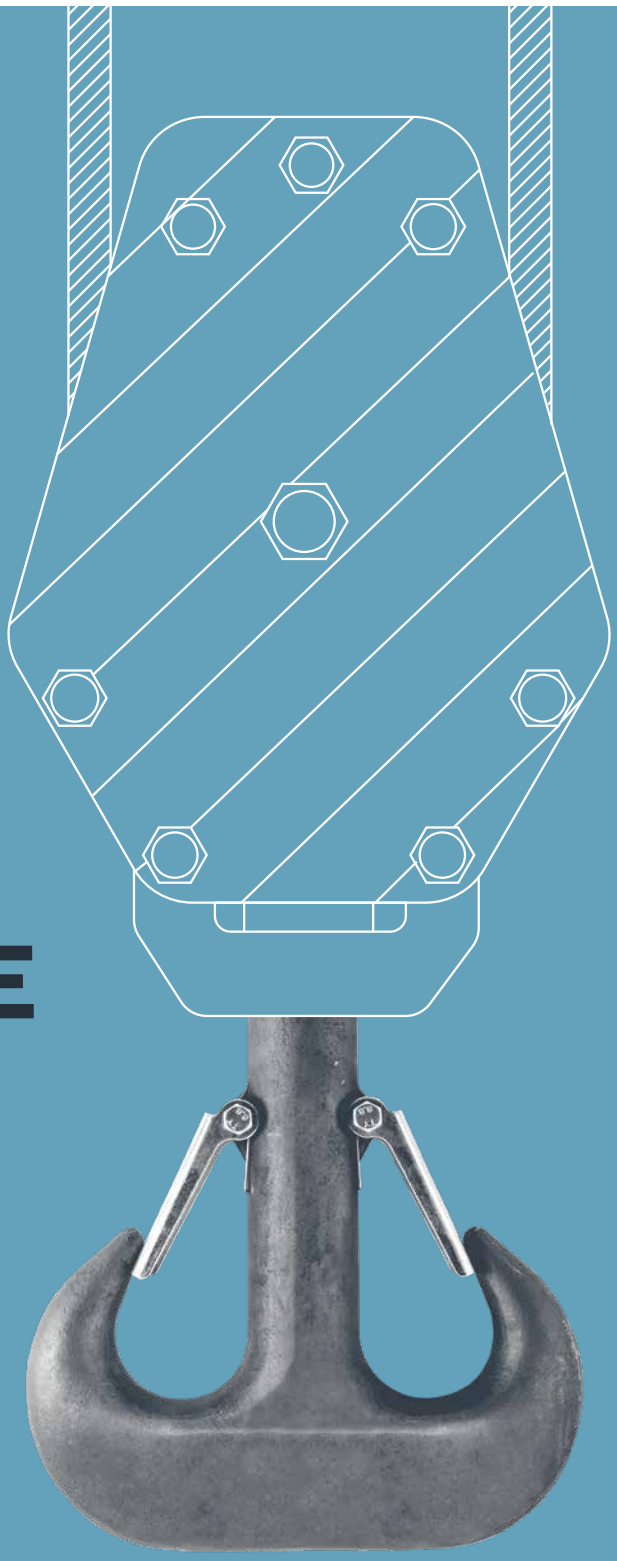

PRODUCT CATALOGUE

THE POWER OF LIFTING

WWW.HEUER-HEBETECHNIK.DE

VAN BEEST

HEUER
HEBETECHNIK



4 ABOUT HEUER HEBETECHNIK

Supplier of premium quality
Mission and vision
Core values

6 UNMACHINED HOOKS

Single hooks
Ramshorn hooks

10 MACHINED HOOKS WITH NUT

Single hooks
Ramshorn hooks

14 COMPLETE HOOK ASSEMBLIES

Single hooks
Ramshorn hooks

18 OTHER HOOKS

Forged eye cargo hooks
Ramshorn eye hooks
Single forged cargo hooks
Forged eye hooks
Laminated hooks
Quad forged hooks

20 FORGINGS

According to customer drawings

20 SPAREPARTS

As part of our customer service

24 CONTACT

How to reach Heuer Hebetechnik

SUPPLIER OF PREMIUM QUALITY CRANE HOOKS SINCE 1893

Founded in 1893, Heuer Hebetechnik has grown into a trusted supplier of high-quality crane hooks for industrial lifting applications. From its location in Germany, a dedicated team ensures fast delivery, technical precision and reliable service. Heuer Hebetechnik works closely with crane manufacturers and OEM partners worldwide to deliver (custom-made) solutions that meet a wide range of standards. Since 2017, the company has been part of the Royal Van Beest Group, strengthening its position in the lifting and rigging industry.

Markets we serve

Heuer Hebetechnik's products are used across a wide range of onshore and offshore industries. We primarily serve lifting block assemblers and mobile crane manufacturers. Our ability to produce high-quality crane hooks according to customer specifications has made us the preferred partner for many Original Equipment Manufacturers (OEMs).

Certified quality, guaranteed performance

All Heuer Hebetechnik hooks meet the highest international standards and come with a type 3.1 certificate to EN 10204. Upon request, we provide US/Lloyd's certification as well as type 3.2 inspection certificates and proof load test certification according to EN 13001. Our products are manufactured according to applicable DIN, EN and BS standards or customer specifications and tested to ensure consistent performance and traceability.



Lloyd's Register

Our quality management system is certified according to ISO 9001:2015, demonstrating our commitment to consistent quality and continuous improvement.

ACT ISO 9001 : 2015

UKAS MANAGEMENT SYSTEMS 0273



OUR CORE VALUES

1. **Excellent service:**
   The excellent customer service helps with your enquiries.
2. **Large stock:**
   We have a large stock to guarantee speedy deliveries.
3. **Highest quality:**
   All hooks according to DIN or EN standards. They allcome with their owncertificates.
4. **Fast delivery:**
   Due to the large stock and possibilities to fast machining there is speedy delivery.

MISSION AND VISION

To provide the highest quality and best service in supplying certified DIN and EN crane hooks, tailored to customer specifications and delivered with unmatched speed and reliability.





UNMACHINED HOOKS

Single forged hooks based on DIN 15401

Unmachined



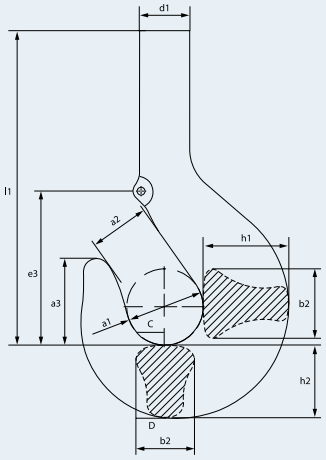



Product information

- According to DIN 15401 from size 1 to 160
- Lifting Capacity (WLL): 1-1000 t
- StE 355 and StE 420 (class P)
- 34CrNiMo6 and 30 CrNiMo8 (class V)
- Class M, T and S to customer specification

SINGLE HOOKS BASED ON DIN15401 | UNMACHINED

Overall dimensions (mm)											Weight
No.	**a1**	**a2**	**a3**	**b1**	**b2**	**d1**	**e3**	**h1**	**h2**	**l1**	**kg**
2,5	63	50	72	53	45	42	132	67	58	253	6,3
4	71	56	80	63	53	48	148	80	67	285	8,8
5	80	63	90	71	60	53	165	90	75	318	12,3
6	90	71	101	80	67	60	185	100	85	380	17,1
8	100	80	113	90	75	67	210	112	95	418	24
10	112	90	127	100	85	75	221	125	106	460	40
12	125	100	143	112	95	85	252	140	118	525	55
16	140	112	160	125	106	95	280	160	132	595	77
20	160	125	180	140	118	106	330	180	150	665	112
25	180	140	202	160	132	118	360	200	170	735	160
32	200	160	225	180	150	132	400	224	190	810	220
40	224	180	252	200	170	150	447	250	212	905	310
50	250	200	285	224	190	170	485	280	226	990	430
63	280	224	320	250	212	190	550	315	265	1120	600
80	315	250	358	280	236	212	598	355	300	1270	860
100	355	280	402	315	265	236	688	400	335	1415	1220
125	400	315	450	355	300	265	750	450	375	1590	1740
160	450	355	505	400	335	300	825	500	425	1790	2480


Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request

UNMACHINED HOOKS

Ramshorn forged hooks based on DIN 15402

Unmachined



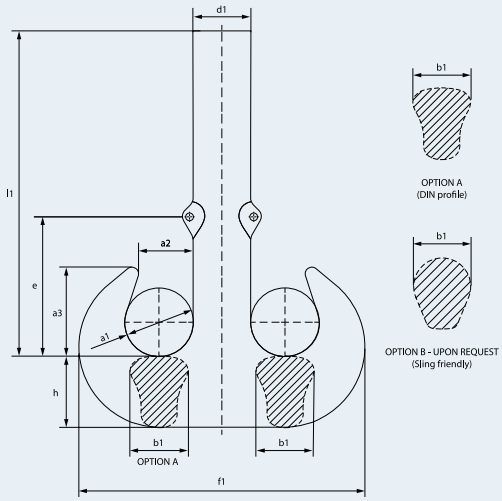

Product information

DIN 15402

- According to DIN 15402 from size 1 to 160
- Lifting Capacity (WLL): 1-1000 t
- StE 355 und StE 420 (class P)
- 34CrNiMo6 and 30CrNiMo8 (class V)
- Class M, T and S to customer specification

RAMSHORN HOOKS BASED ON DIN 15402 | UNMACHINED

Overall dimensions (mm)										Weight
No.	a1	a2	a3	b1	d1	e	f1	h	l1	kg
2,5	50	40	65	40	42	112	208	50	250	6,9
4	56	45	73	48	48	124	238	60	280	9,7
5	63	50	82	53	53	143	266	67	312	13,4
6	71	56	92	60	60	160	301	75	375	16,8
8	80	63	103	67	67	182	337	85	415	25,3
10	90	71	116	75	75	192	377	95	450	36,3
12	100	80	130	85	Rd 85	210	421	106	510	50.5
16	112	90	146	95	Rd 95	237	471	118	580	71.1
20	125	100	163	106	Rd 106	265	531	132	650	99.5
25	140	112	182	118	Rd 118	315	598	150	715	138
32	160	125	205	132	Rd 132	335	672	170	790	197
40	180	140	230	150	Rd 150	375	754	190	885	286
50	200	160	260	170	Rd 170	420	842	212	965	394
63	224	180	292	190	Rd 190	460	944	236	1090	539
80	250	200	325	212	Rd 212	515	1062	265	1235	750
100	280	224	364	236	Rd 236	575	1186	300	1375	1050
125	315	250	408	265	Rd 265	645	1330	335	1550	1480
160	355	280	458	300	Rd 300	725	1505	375	1714	1970
200	400	315	515	335	Rd 335	800	1685	425	1885	2463
250	450	355	580	375	Rd 375	875	1885	475	2125	3437


Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request

UNMACHINED HOOKS

Ramshorn Forged Hook – Type B based on DIN 15402-B

Unmachined



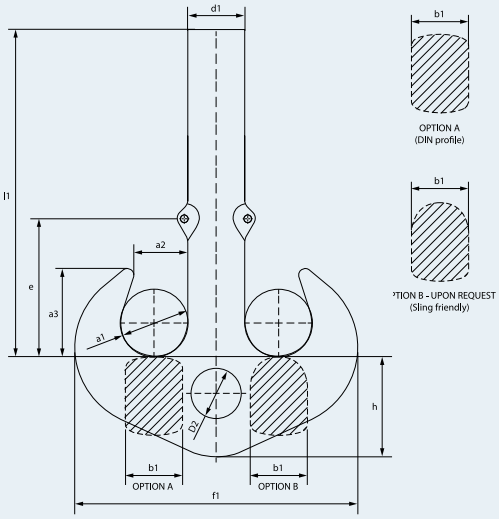

Product information

- According to DIN 15402-B/EN 13001 from size 1 to 250
- StE 355 and StE 420 (class P)
- 34CrNiMo6 and 30 CrNiMo8 (class V)
- Certificate: 3.1 EN 10204

RAMSHORN FORGED HOOKS BASED ON DIN15402-B | UNMACHINED

Overall dimensions (mm)											Weight
No.	**a1**	**a2**	**a3**	**b1**	**d1**	**d2 h15**	**e**	**f1**	**h**	**l1**	**kg**
2.5	50	40	65	40	42	36	112	208	50	243.5	1.6
4	56	45	73	48	48	42	124	238	60	274	2.5
5	63	50	82	53	53	45	143	266	67	306	4
6	71	56	92	60	60	50	160	301	75	365.5	6
8	80	63	103	67	67	56	182	337	85	403	8
10	90	71	116	75	75	64	192	377	95	435	12
12	100	80	130	85	85	72	210	421	106	492	16
16	112	90	146	95	95	80	237	471	118	562	20
20	125	100	163	106	106	90	265	531	132	628	25
25	140	112	182	118	118	100	315	598	150	696	32
32	160	125	205	132	132	110	335	672	170	768	40
40	180	140	230	150	150	125	375	754	190	863	50
50	200	160	260	170	170	140	420	842	212	944	63
63	224	180	292	190	190	160	460	944	236	1072	80
80	250	200	325	212	212	180	515	1062	265	1212	100
100	280	224	364	236	236	200	575	1186	300	1351	125
125	315	250	408	265	265	225	645	1330	335	1522	160
160	355	280	458	300	300	250	725	1505	375	1714	200
200	400	315	515	335	335	280	800	1685	425	1962	250
250	450	355	580	375	375	320	875	1885	475	2217	320

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request



LIEBHERR

MACHINED HOOKS

Single forged hooks based on DIN 15401

Machined with nut



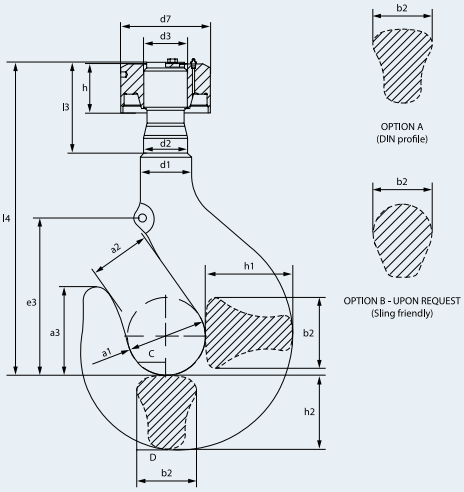

Product information

- According to DIN 15411/15401 from size 1 to 160
- Lifting Capacity (WLL): 1-1000 t
- StE 355 and StE 420 (class P)
- 34CrNiMo6 and 30 CrNiMo8 (class V)
- Class M, T and S to customer specification
- Certificate: 3.1 EN 10204

SINGLE HOOKS BASED ON DIN15401 | MACHINED FITTED WITH NUT

Overall dimensions (mm)														DIN15413 Nut		Weight
No.	a1	a2	a3	b1	b2	d1	e3	h1	h2	d2 h11	d3	l3	l4	d7	h	kg
2,5	63	50	72	53	45	42	132	67	58	36	M36	83	250	70	44	7,4
4	71	56	80	63	53	48	148	80	67	42	M42	93	281,5	80	49	10,3
5	80	63	90	71	60	53	165	90	75	45	M45	103	314,5	95	56	14,4
6	90	71	101	80	67	60	185	100	85	50	Rd50x6	112	375	115	60	20,7
8	100	80	113	90	75	67	210	112	95	56	Rd56x6	122	413	125	67	28,8
10	112	90	127	100	85	75	221	125	106	64	Rd64x8	135	446	145	76	40,9
12	125	100	143	112	95	85	252	140	118	72	Rd72x8	157	504,5	165	87	65,4
16	140	112	160	125	106	95	280	160	132	80	Rd80x10	170	576	175	91	90
20	160	125	180	140	118	106	330	180	150	90	Rd90x10	187	645	185	102	130
25	180	140	202	160	132	118	360	200	170	100	Rd100x12	207	716	205	113	184
32	200	160	225	180	150	132	400	224	190	110	Rd110x12	232	788	240	131	254
40	224	180	252	200	170	150	447	250	212	125	Rd125x14	257	885	270	144	361
50	250	200	285	224	190	170	485	280	236	140	Rd140x16	280	969	320	153	502
63	280	224	320	250	212	190	550	315	265	160	Rd160x18	322	1100	360	181	700
80	315	250	358	280	236	212	598	355	300	180	Rd180x20	357	1245	400	198	1007
100	355	280	402	315	365	236	688	400	335	200	Rd200x22	402	1388	445	228	1417
125	400	315	450	355	300	265	750	450	375	225	Rd225x24	465	1565	490	246	2026
160	450	355	505	400	335	300	825	500	425	250	Rd250x28	510	1761	530	274	2846


Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request

MACHINED HOOKS

Ramshorn forged hooks based on DIN 15402

Machined with nut



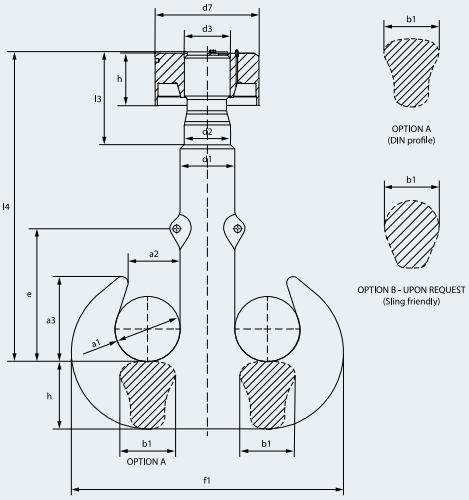

Product information

- According to DIN 15402/EN 13001 from size 1 to 250
- Lifting Capacity (WLL): 1-1000 t
- StE 355 and StE 420 (class P)
- 34CrNiMo6 and 30 CrNiMo8 (class V)
- Class T and S to customer specification
- Certificate: 3.1 EN 10204

RAMSHORN HOOKS BASED ON DIN 15402 | MACHINED FITTED WITH NUT

Overall dimensions (mm)															Weight
No.	a1	a2	a3	b1	d1	e	f1	h1	d2 h11	d3	l3	l4	d7	h	kg
2,5	50	40	65	40	42	112	208	50	36	M36	83	243,5	70	44	7,5
4	56	45	73	48	48	124	238	60	42	M42	93	274	80	49	10,6
5	63	50	82	53	53	143	266	67	45	M45	103	306	95	56	14,6
6	71	56	92	60	60	160	301	75	50	Rd50x6	112	365,5	115	60	20,4
8	80	63	103	67	67	182	337	85	56	Rd56x6	122	403	125	67	30,3
10	90	71	116	75	75	192	377	95	64	Rd64x8	135	435	145	76	43,3
12	100	80	130	85	85	210	421	106	72	Rd72x8	157	492	165	87	61
16	112	90	146	95	95	237	471	118	80	Rd80x10	170	562	175	91	84
20	125	100	163	106	106	265	531	132	90	Rd90x10	187	628	185	102	117
25	140	112	182	118	118	315	598	150	100	Rd100x12	207	696	205	113	161
32	160	125	205	132	132	335	672	170	110	Rd110x12	232	768	240	131	230
40	180	140	230	150	150	375	754	190	125	Rd125x14	257	863	270	144	336
50	200	160	260	170	170	420	842	212	140	Rd140x16	280	944	320	153	464
63	224	180	292	190	190	460	944	236	160	Rd160x18	322	1072	360	181	644
80	250	200	325	212	212	515	1062	265	180	Rd180x20	357	1212	400	198	901
100	280	224	364	236	236	575	1186	300	200	Rd200x22	402	1351	445	228	1249
125	315	250	408	265	265	645	1330	335	225	Rd225x24	465	1522	490	246	1765
160	355	280	458	300	300	725	1505	375	250	Rd250x28	510	1714	530	274	2463
200	400	315	515	335	335	800	1685	425	280	Rd280x32	613	1962	590	343	3437
250	450	355	580	375	375	875	1885	475	320	Rd320x36	690	2217	680	383	4852

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request


HEUER
HEBETECHNIK

MACHINED HOOKS

Ramshorn forged hooks based on DIN 15402-B

Machined with nut



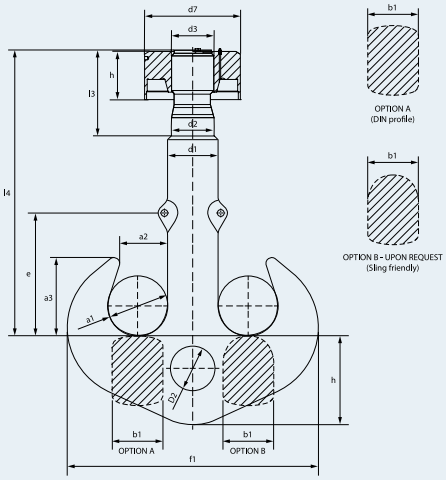

Product information

- According to DIN 15402 from size 1 to 160
- Lifting Capacity (WLL): 1-1000 t
- StE 355 and StE 420 (class P)
- 34CrNiMo6 and 30 CrNiMo8 (class V)
- Certificate: 3.1 EN 10204

RAMSHORN FORGED HOOKS BASED ON DIN 15402-B | MACHINED FITTED WITH NUT

	Overall dimensions (mm)														Weight
No.	**a1**	**a2**	**a3**	**b1**	**d1**	**e**	**f1**	**h1**	**d2-h15**	**d3**	**l3**	**l4**	**d7**	**h**	**kg**
2,5	50	40	65	40	42	112	208	50	36	M36	83	243.5	70	44	9.5
4	56	45	73	48	48	124	238	60	42	M42	93	274	80	49	13.5
5	63	50	82	53	53	143	266	67	45	M45	103	306	95	56	20.6
6	71	56	92	60	60	160	301	75	50	Rd50x6	112	365.5	115	60	27
8	80	63	103	67	67	182	337	85	56	Rd56x6	122	403	125	67	39.5
10	90	71	116	75	75	192	377	95	64	Rd64x8	135	435	145	76	57
12	100	80	130	85	85	210	421	106	72	Rd72x8	157	492	165	87	81
16	112	90	146	95	95	237	471	118	80	Rd80x10	170	562	175	91	108
20	125	100	163	106	106	265	531	132	90	Rd90x10	187	628	185	102	145.5
25	140	112	182	118	118	315	598	150	100	Rd100x12	207	696	205	113	199.5
32	160	125	205	132	132	335	672	170	110	Rd110x12	232	768	240	131	323
40	180	140	230	150	150	375	754	190	125	Rd125x14	257	863	270	144	462
50	200	160	260	170	170	420	842	212	140	Rd140x16	280	944	320	153	656
63	224	180	292	190	190	460	944	236	160	Rd160x18	322	1072	360	181	921
80	250	200	325	212	212	515	1062	265	180	Rd180x20	357	1212	400	198	1281
100	280	224	364	236	236	575	1186	300	200	Rd200x22	402	1351	445	228	1749
125	315	250	408	265	265	645	1330	335	225	Rd225x24	465	1522	490	246	2295
160	355	280	458	300	300	725	1505	375	250	Rd250x28	510	1714	530	274	2463
200	400	315	515	335	335	800	1685	425	280	Rd280x32	613	1962	590	343	3437
250	450	355	580	375	375	875	1885	475	320	Rd320x36	690	2217	680	383	4852

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request



EN 13001
25 t
KF
HH

COMPLETE HOOK ASSEMBLIES

Complete single hook assembly

Based on DIN 15401



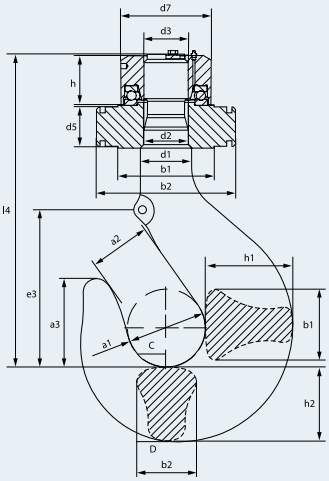

Product information

- According to DIN 15411/15401 from size 1 to 160
- Lifting Capacity (WLL): 1-1000 t
- StE 355 and StE 420 (class P)
- 34CrNiMo6 and 30 CrNiMo8 (class V)
- Class M, T and S to customer specification
- Certificate: 3.1 EN 10204

SINGLE FORGED HOOKS BASED ON DIN 15401 DESIGN | COMPLETE HOOK ASSEMBLY

Overall dimensions (mm)																	Weight
No.	**a1**	**a2**	**a3**	**b1**	**b2**	**d1**	**e3**	**h1**	**h2**	**d2 h11**	**d3**	**l4**	**b1-**	**b2-**	**d5 h9**	**d7**	**h**	**kg**
2,5	63	50	72	53	45	42	132	67	58	36	M36	250	80	125	30	70	44	9,2
4	71	56	80	63	53	48	148	80	67	42	M42	281,5	90	140	35	80	49	13
5	80	63	90	71	60	53	165	90	75	45	M45	314,5	100	155	40	95	56	18,6
6	90	71	101	80	67	60	185	100	85	50	Rd50x6	375	125	185	45	115	60	27,4
8	100	80	113	90	75	67	210	112	95	56	Rd56x6	413	140	210	50	125	67	38
10	112	90	127	100	85	75	221	125	106	64	Rd64x8	446	160	230	55	145	76	54,6
12	125	100	143	112	95	85	252	140	118	72	Rd72x8	504,5	180	265	60	165	87	85,5
16	140	112	160	125	106	95	280	160	132	80	Rd80x10	576	190	275	70	175	91	114,5
20	160	125	180	140	118	106	330	180	150	90	Rd90x10	645	200	295	80	185	102	158,5
25	180	140	202	160	132	118	360	200	170	100	Rd100x12	716	220	318	90	205	113	222,6
32	200	160	225	180	150	132	400	224	190	110	Rd110x12	788	260	378	100	240	131	315
40	224	180	252	200	170	150	447	250	212	125	Rd125x14	885	285	415	110	270	144	443
50	250	200	285	224	190	170	485	280	236	140	Rd140x16	969	335	465	125	320	153	630
63	280	224	320	250	212	190	550	315	265	160	Rd160x18	1100	380	522	140	360	181	885
80	315	250	358	280	236	212	598	355	300	180	Rd180x20	1245	420	565	160	400	198	1254
100	355	280	402	315	365	236	688	400	335	200	Rd200x22	1388	470	645	180	445	228	1768
125	400	315	450	355	300	265	750	450	375	225	Rd225x24	1565	510	685	200	490	246	2491
160	450	355	505	400	335	300	825	500	425	250	Rd250x28	1761	550	750	220	530	274	3483


Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request

COMPLETE HOOK ASSEMBLIES

Complete ramshorn hook assembly

Based on DIN 15402



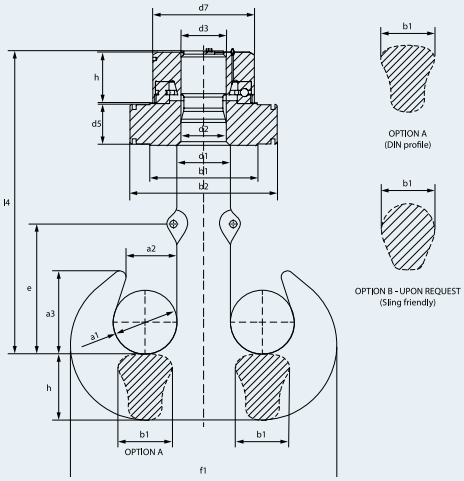

Product information

- According to DIN 15402/EN 13001 from size 1 to 250
- Lifting Capacity (WLL): 1-1000 t
- StE 355 and StE 420 (class P)
- 34CrNiMo6 and 30 CrNiMo8 (class V)
- Class T and S to customer specification
- Certificate: 3.1 EN 10204

RAMSHORN HOOKS BASED ON DIN 15402 | COMPLETE HOOK ASSEMBLY

Overall dimensions (mm)																	Weight
No.	a1	a2	a3	b1	d1	e	f1	h1	d2 h11	d3	l4	b1-	b2-	d5 h9	d7	h	kg
2,5	50	40	65	40	42	112	208	50	50	36	M36	243,5	80	125	30	70	44
4	56	45	73	48	48	124	238	60	60	42	M42	274	90	140	35	80	49
5	63	50	82	53	53	143	266	67	67	45	M45	306	100	155	40	95	56
6	71	56	92	60	60	160	301	75	75	50	Rd50x6	365,5	125	185	45	115	60
8	80	63	103	67	67	182	337	85	85	56	Rd56x6	403	140	210	50	125	67
10	90	71	116	75	75	192	377	95	95	64	Rd64x8	435	160	230	55	145	76
12	100	80	130	85	85	210	421	106	72	106	72	492	185	260	60	165	87
16	112	90	146	95	95	237	471	118	80	118	80	562	205	285	65	175	91
20	125	100	163	106	106	265	531	132	90	132	90	628	225	315	70	185	102
25	140	112	182	118	118	315	598	150	100	150	100	696	250	350	75	205	113
32	160	125	205	132	132	335	672	170	110	170	110	768	280	390	80	240	131
40	180	140	230	150	150	375	754	190	125	190	125	863	310	430	85	270	144
50	200	160	260	170	170	420	842	212	140	212	140	944	340	470	90	320	153
63	224	180	292	190	190	460	944	236	160	236	160	1072	380	520	95	360	181
80	250	200	325	212	212	515	1062	265	180	265	180	1212	420	570	100	400	198
100	280	224	364	236	236	575	1186	300	200	300	200	1351	470	630	105	445	228
125	315	250	408	265	265	645	1330	335	225	335	225	1522	520	690	110	490	246
160	355	280	458	300	300	725	1505	375	250	375	250	1714	580	760	115	530	274
200	400	315	515	335	335	800	1685	425	280	425	280	1962	650	850	120	590	343
250	450	355	580	375	375	875	1885	475	320	475	320	2217	750	950	125	680	383

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request


HEUER
HEBETECHNIK

COMPLETE HOOK ASSEMBLIES

Complete ramshorn hook assembly - Type B

Based on DIN 15402-B



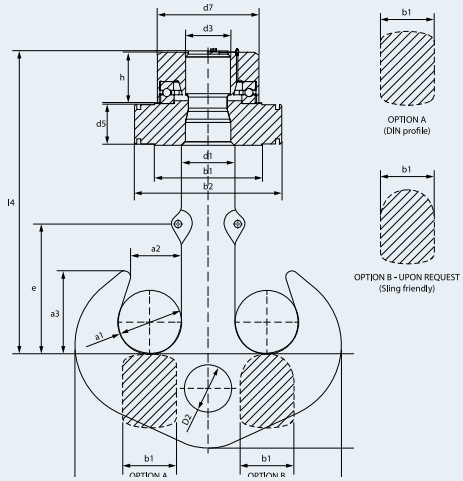

Product information

- According to DIN 15402-B/EN 13001 from size 1 to 250
- Lifting Capacity (WLL): 1-1000 t
- StE 355 and StE 420 (class P)
- 34CrNiMo6 and 30 CrNiMo8 (class V)
- Classes M, S and T available to customer specification
- Certificate: 3.1 EN 10204

RAMSHORN HOOKS BASED ON DIN 15402-B | COMPLETE HOOK ASSEMBLY

Overall dimensions (mm)																	Weight
No.	**a1**	**a2**	**a3**	**b1**	**d1**	**e**	**f1**	**d2 h15**	**h1**	**d3**	**l4**	**b1-**	**b2-**	**d5 h9**	**d7**	**h**	**kg**
2,5	50	40	65	40	42	112	208	36	70	M36	83	60	45	30	70	44	9.5
4	56	45	73	48	48	124	238	42	80	M42	93	70	50	35	80	49	13.5
5	63	50	82	53	53	143	266	45	95	M45	103	80	55	40	95	56	20.6
6	71	56	92	60	60	160	301	50	115	Rd50x6	112	90	60	45	115	60	27
8	80	63	103	67	67	182	337	56	125	Rd56x6	122	100	65	50	125	67	39.5
10	90	71	116	75	75	192	377	64	145	Rd64x8	135	110	70	55	145	76	57
12	100	80	130	85	85	210	421	72	165	Rd72x8	157	120	75	60	165	87	81
16	112	90	146	95	95	237	471	80	175	Rd80x10	170	130	80	65	175	91	108
20	125	100	163	106	106	265	531	90	185	Rd90x10	187	140	85	70	185	102	145.5
25	140	112	182	118	118	315	598	100	205	Rd100x12	207	150	90	75	205	113	199.5
32	160	125	205	132	132	335	672	110	240	Rd110x12	232	160	95	80	240	131	323
40	180	140	230	150	150	375	754	125	270	Rd125x14	257	170	100	85	270	144	462
50	200	160	260	170	170	420	842	140	320	Rd140x16	280	180	105	90	320	153	656
63	224	180	292	190	190	460	944	160	360	Rd160x18	322	190	110	95	360	181	921
80	250	200	325	212	212	515	1062	180	400	Rd180x20	357	200	115	100	400	198	1281
100	280	224	364	236	236	575	1186	200	445	Rd200x22	402	210	120	105	445	228	1749
125	315	250	408	265	265	645	1330	225	490	Rd225x24	465	220	125	110	490	246	2295
160	355	280	458	300	300	725	1505	250	530	Rd250x28	510	230	130	115	530	274	2463
200	400	315	515	335	335	800	1685	280	590	Rd280x32	613	240	135	120	590	343	3437
250	450	355	580	375	375	875	1885	320	680	Rd320x36	690	250	140	125	680	383	4852

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request



OTHER HOOKS

Forged eye cargo hooks - **based on DIN 82017**



Product information

- According to DIN 82017
- Lifting Capacity (WLL): 10-100 t. Larger sizes upon request.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, V.
- Certificate: 3.1 EN 10204

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request

Single forged cargo hooks - **based on BS 2903:1980-C**



Product information

- According to BS 2903 1980 -C
- Lifting Capacity (WLL): 10-50 t. Larger sizes upon request.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, V.
- Certificate: 3.1 EN 10204

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request

Laminated hooks - **based on DIN 15407**



Product information

- With a point for spigot ladles and assembly.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, V.
- Certificate: 3.1 EN 10204

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request
Note: a_1, d_1 and l_1 may be changed under special conditions. The deviating dimensions must be agreed upon. This rivet only from lamella hooks 160 × 250.

OTHER HOOKS

Ramshorn eye hooks - **based on DIN 82019**



Product information

- According to DIN 82019
- Lifting Capacity (WLL): 80-1250 t. Larger sizes upon request.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, V.
- Certificate: 3.1 EN 10204

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request

Forged eye hooks - **based on DIN 7540**



Product information

- According to DIN 7540
- Lifting Capacity (WLL): 3-400 t (for super alloy materials).
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, V.
- Certificate: 3.1 EN 10204

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request

Quad forged hooks - **based on DIN 15402-C**



Product information

- According to DIN 15402-C and EN 13001 from size 1 to 250
- Lifting Capacity (WLL): 160-2600 t with equal loading across all four horns.

Upon request: US/LIOYD, 3.2 inspection certificate and proofload test EN13001
Modifications: Larger sizes available upon request

CUSTOM MADE FORGINGS

High-quality forgings manufactured according to your drawings and specific technical requirements.



We supply high-quality forgings based on customer drawings, including quad forged hooks based on DIN 15402-C and EN 13001.

Solutions are available in superalloys and in classes V and W, with working load limits up to 2600 t.

SPARE PARTS FOR HOOKS



As part of our customer service, we supply spare parts for crane hooks, including replacement nuts and safety latches.

Contact us for availability and further product information.

CONTACT


Do you have any questions or specific requests?
Here's how to reach us.

HEUER HEBETECHNIK GMBH

Osemundstraße 13
58636 Iserlohn
T +49 (0) 2371 6438
F +49 (0) 2371 689994

www.heuer-hebetechnik.com
info@heuer-hebetechnik.de



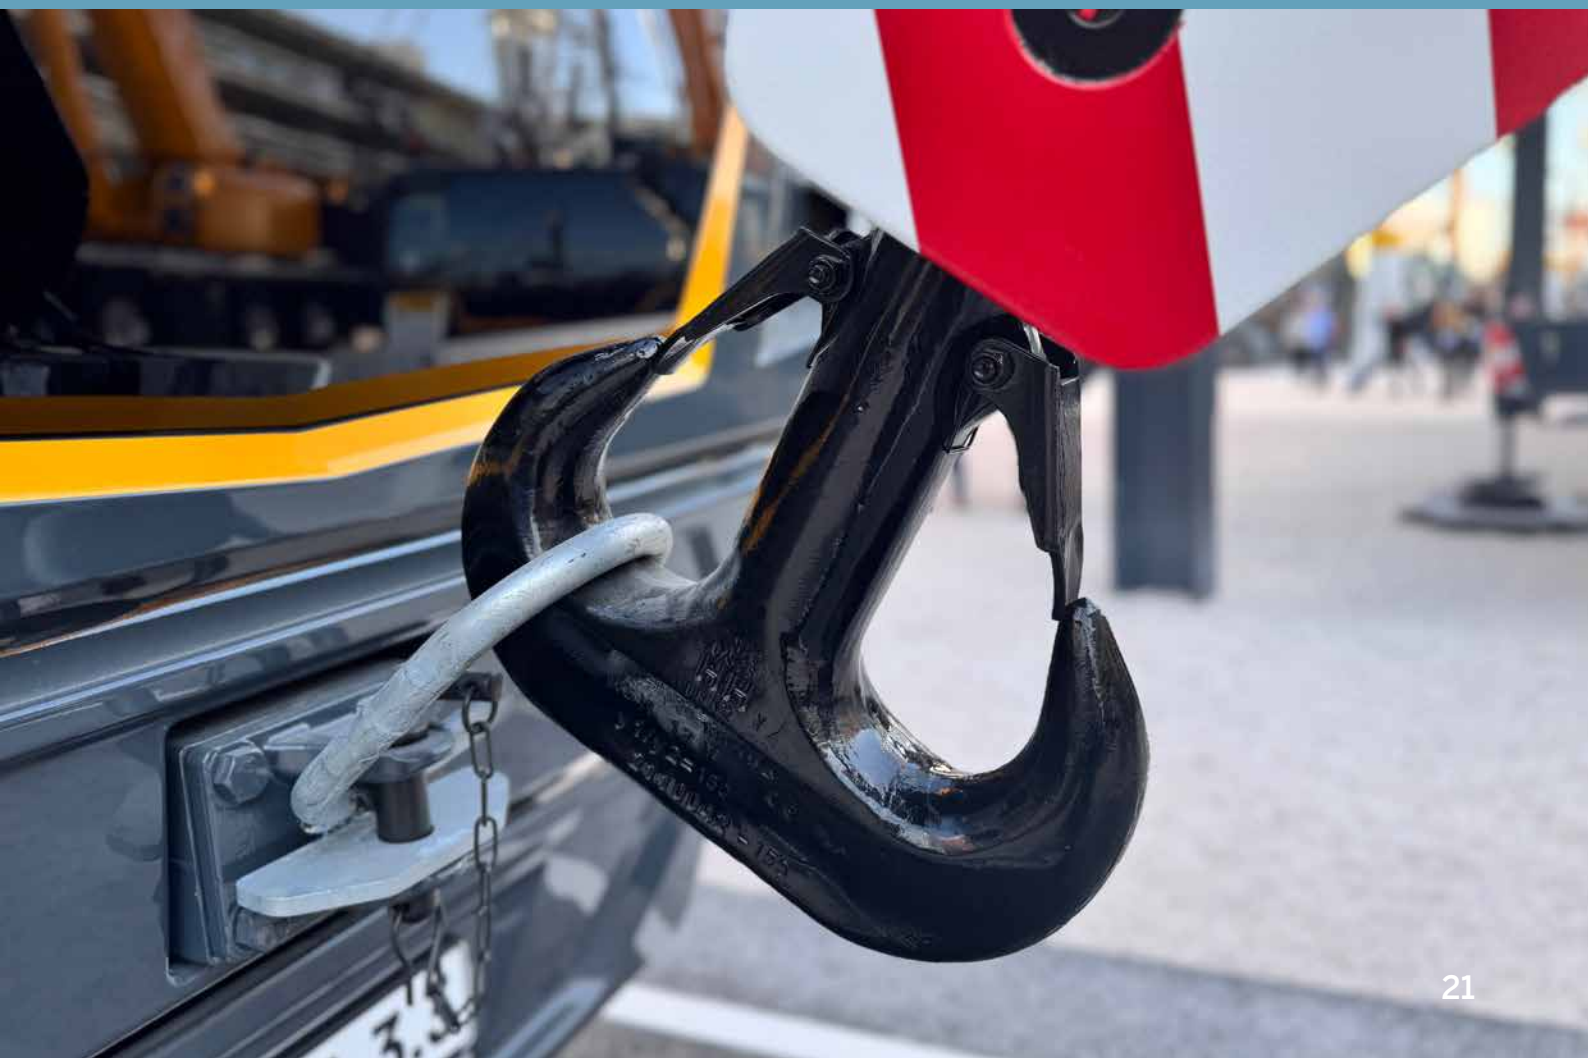

HEUER
HEBETECHNIK




SMW-AUTOBLOK

HEUER
HEBETECHNIK



THE POWER OF LIFTING

WWW.HEUER-HEBETECHNIK.DE

VAN BEEST